

Lorrie L. Sorensen
 Register of Deeds - Wexford County, MI



**Land Corner Recordation Certificate
 Attachment B to 2016 Annual Grant Agreement**

Authority: MCL 54.205 and R54.202

This form is **ONLY** for corners filed under the 2016 State Survey and Remonumentation Grant Agreement

Filing Requirement: MCL 54.268(2)(a), 54.268(2)(d), 54.201 - 54.210d and 2016 State Survey and Remonumentation Grant Agreement


Notes:

- No more than two Original Public Land Survey Corners can be recorded on this certificate
- If a corner reported hereon is common to two or more survey townships, each Town, Range and Corner Code for the corner may be identified on this certificate
- If a corner reported hereon is common to two or more counties, each county may be identified on this certificate and a copy of this certificate filed with the Register of Deeds in each county

For corner(s) in: Wexford County

Siagle Township

Corner Type	Survey Township	Corner Code
Original Public Land Survey Corner	T 22N R 12W	C-7
• MCL 54.202(g)	T _____ R _____	_____
• MCL 54.262(g)	T _____ R _____	_____
Property Controlling Corner	S _____ T _____ R _____	_____
• MCL 54.202(i)	S _____ T _____ R _____	_____
• MCL 54.262(h)	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
Protracted Public Land Survey Corner	T _____ R _____	_____
• MCL 54.202(k)	T _____ R _____	_____
• MCL 54.262(i)	T _____ R _____	_____

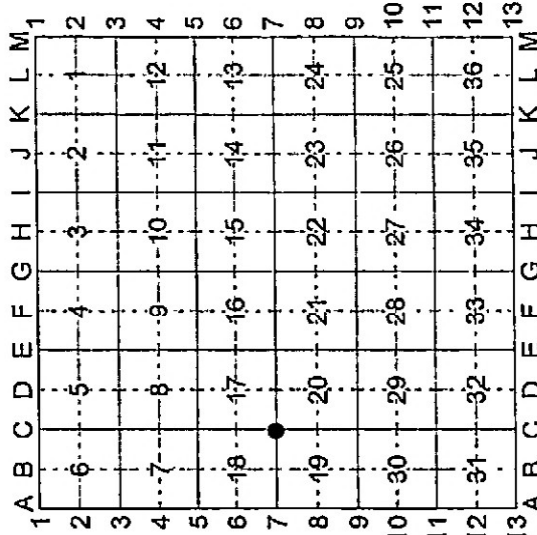

Part A: Corner(s) History

C-7, Being the corner common to Sections 17, 18, 19 and 20, T22N, R12W.

- 1848 Orange Risdon; Re-Survey; Set post corner to Sections 17, 18, 19 & 20; (1) Hemlock 12 N59W 31; (2) W. Maple 9 S59E 12
- 1907 Devoe; (USFS Index Cards) Iron Bar in RR Tracks; Pine Stump N58W 54' Pine Stump 20" S76E 45 (Believe this entry to be in error).
- 1913 Teed, Book 159, P.12 & L.1, P.226; Found stake and both Gov't wit, except distance about 6 in. too much. There were also three trees at this corner with section marks quite plain; (3) W. Pine Stub 30 N52½E 48L; (4) Hem. 12 S43½E 50L (Old Gov't range tree); (5) W. Pine 30 S62E 91½.
- 1992 R. A. Griffin (USFS Index Cards) Fnd ½" iron in Rd centerline N and 2' N of Rd centerline E-W; (6) R. Maple 12" N40E 31.93'; (7) R. Maple 11" S10W 24.31'; (8) W. Birch 11" S65W 31.58'