


**SURVEY &
REMONUMENTATION**

AUG 06 2008

SECTION

OSCODA COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970



For corners in

OSCODA
(County)

Located In: Corner Code #

JERI WINTON
OSCODA COUNTY

REGISTER OF DEEDS

07/29/2008 09:32:58AM

FEE: \$17.00

PAGES: 2 RCPT#: 8285

LC8-142 CORNER RECORDATION

1. Public Land Survey T 26N R 1E C-5
2. Property Controlling S --- R --- **APPROVED**
3. Miscellaneous S --- R --- County-Remonumentation
- Property in Sec. S --- R --- Peer Review Group

APPROVED

County-Remonumentation

Peer Review Group

ACC 18 JULY 08

Register of Deeds Stamp & File Number

1	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1	10	9	8	7	6	5	4
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

4. Lot No. --- Recorded Plat
5. Private Claims

I, Marvin E. Myers, P.S., in a field survey on Jan 7 20 08 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-5 Section Corner common to Sections 7, 8, 17, & 18 T26N-R01E.

1839 GLO William R. Coon Deputy Surveyor

Mon - Set post Corner Sections 17, 18, 7, 8

Wit: Spr. Pine 8" S82°E 19 lks (12.54')

Spr. Pine 4" N30°W 22 lks (14.52')

1908 W. Fargo, PE Fargo Engineering

Mon - Found corner

Wit: 14" Y. Pine N37°30'W 111 lks (73.26')

14" Y. Pine S18°30'W 150 lks (99.00')

1884 John Randall, CS

Mon - Identified corner by stumps US legible and stake

Wit: S. P. 4" N30°W 22 lks

S. P. 8" S82°E 19 lks

NBT 10" W Pine S14°W 13 lks (8.58')

NBT 12" W Pine N38°E 36 lks (23.76')

Brook West 300 lks (198')

1924 G F DeLamater, #2674

Mon - Indicates corner found

Wit: 14" Y. Pine N37°30'W 111 lks (73.26')

14" Y. Pine S18°30'W 150 lks (99.00')

See back of Sheet for Part A continued:

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-5 Section Corner common to Sections 7, 8, 17, & 18 T26N-R01E.


Found a USGLO concrete monument with a brass cap in good condition 2± South of East and North fence corner, left in place and set 2 nails alongside the monument for magnetic attraction; N25°E 78.60' found 28" Red pine; N30°E 34.00' found power pole; S22°W 99.00' found 27" Red pine; N37°W 73.26' found 20" Red pine stump; N15°W 90.24' found 26" Red pine; Set nails and tags in the above witnesses except for the stump.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-5 Section Corner common to Sections 7, 8, 17, & 18 T26N-R01E.

Mon - USGLO concrete monument with a brass cap in good condition. Set 2 nails alongside the monument for magnetic attraction.

- Wit: N25°E 78.64' Set nail & tag in West side of 28" Red pine.
 N30°E 33.83' Set nail & tag in Northwest side of Power pole.
 S22°W 99.19' Set nail & tag in West side of 27" Red pine.
 N15°W 90.13' Set nail & tag in West side of 26" Red pine.
 N02°E 2.76' Face of 3" Iron fence corner post.
 North 2± Set Carsonite post.
 East 17± C/L of North/South overhead electric line.
 North 30± C/L of East/West overhead electric line.
 East 25± C/L of North/South two-track trail road.

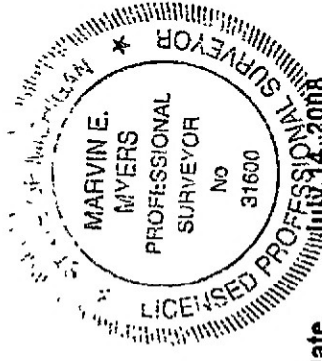

Signed by *Marvin E. Myers*
Surveyor's Michigan License No. 31600

Date