

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970 as Amended

SECTION

For corners in

CHEBOYGAN (County)



RECEIVED FOR RECORD
MARY ELLEN TRYBAN, CLERK/REGISTRAR
CHEBOYGAN COUNTY, MICHIGAN
09/21/2006 11:28:40 AM

Located In: Corner Code #

\$17.00 RECEIPT# 10763, STATION 2
LAND CORNER RECORDAT

1. Public Land Survey T 35N R 2W C-10

- T R
- T R
- T R
- T R
- 2. Property Controlling S
- in Section S
- 3. Miscellaneous S
- Property in Sec. S

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat
5. Private Claims

I, BRIAN K. FULLFORD, in a field survey on July 18, 2006 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10							●	28	27	26	25		
11													
12										32	33	34	35
13													

A. Description of original monument and accessories and/or subsequent restoration:

- August 1855 Harvey Meilen
Set 1/4 corner
12" B. Ash S2°W 32 links
9" Cedar N21°W 34 links
- 1960 Unrecorded DNR
survey
Kenneth Ostling #10068
DNR survey shows corner
- December 1960
MSHD, LCRC Unrecorded
Norman Caldwell #12018
Set 1/2" iron 5' long
17" Cedar N25°W 19.08'
15" Cedar N30°E 14.45'
11" Cedar S60°W 21.44'
12" W. Birch S5°E 27.88'
Orig. BT N21°W 22.44' stump

- January 1962 LCRC, Liber A, Pg 379
Dean C. DeLaMeter #5779
Set 1/2" x 5' iron rod
17" Cedar N25°W 19.08'
15" Cedar N30°E 14.45'
11" Cedar S60°W 21.44'
12" W. Birch S05°E 27.88'
Orig. BT stump N21°W 22.44'

See continuation on back

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- Fnd. 1/2" bar 24" below water surface
- 8" below sand
- 21" Cedar N33°E 14.00'
- 18" Cedar N28°W 18.65'
- 14" Cedar S32°E 18.25'
- 13" Cedar S55°W 20.30'
- 4± from North Bank
- 14± from South Bank


ACCEPTED BY THE CHEBOYGAN COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER PAR. 245 OF 1990, AS AMENDED, AT A MEETING HELD ON 8-24-06

James H. Beyerle

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-10 Placed Cheboygan County Remonumentation cap on 1/2" bar. Position is accepted as a careful and faithful perpetuation of the original corner.

- 8" below sand
- 21" Cedar N33°E 14.00'
- 18" Cedar N28°W 18.65'
- 14" Cedar S32°E 18.25'
- 13" Cedar S55°W 20.30'
- 4± from North Bank
- 14± from South Bank

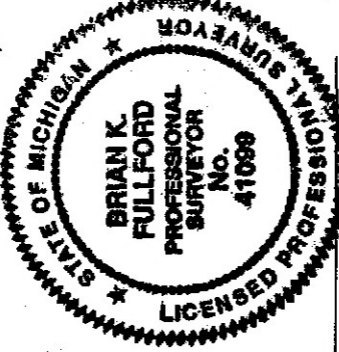

Signed by *B. Fullford*
Surveyor's Michigan License No. 41088

Date September 11, 2006