

LAND CORNER RECORDATION CERTIFICATE SECTION

Filing Requirement of Act 74, Mich. P.A. 107n as Amended



RECEIVED FOR RECORD
MARY ELLEN TRYBAN, CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN
09/21/2006 11:28:40 AM

For corners in CHEBOYGAN (County) Located In: _____ Corner Code # _____

RECEIPT# 10763 STATION 2
LAND CORNER RECORDAT

\$14.00

1. Public Land Survey T 35N R 2W C-11

_____ T _____ R _____
 _____ T _____ R _____
 _____ T _____ R _____
 _____ T _____ R _____
 _____ T _____ R _____
 _____ T _____ R _____
 _____ T _____ R _____

2. Property Controlling _____ S _____
 in Section _____ S _____
 3. Miscellaneous _____ S _____
 Property in Sec. _____ S _____

Register of Deeds Stamp & File
Number

4. Lot No. _____, Recorded Plat
 5. Private Claims

I, BRIAN K. FULLFORD, in a field survey on July 17, 2006 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:

- August 1855
Harvey Mellen
Set post at cor.
16" W. Pine S39°E 1.16 links
15" Cedar N18°E 72 links
- 1960 MDNR Project #R-16-G
Kenneth Ostling #10068
Survey shows corner
No witnesses given
- August 1960
Unrecorded MDNR LCRC
Set 1" pipe w/ 4" brass cap
14" J. Pine N67°W 289 links
20" Elm S35°W
- January 1962 LCRC, Liber A, Pg 377
Dean C. DeLaMeter #5778
1" pipe w/ 4" brass cap
14" J. Pine N67°W 289 links
20" Elm S35°W
- July 1967 MDOT project #16022
William R. Downey MDOT
Fnd. 4" brass cap on 1" pipe
14" J. Pine N67°W 190.74'
P.p. S63°E 71.70'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- MDNR monument
12" Poplar N50°W 55.90'
10" Poplar N15°W 24.02'
10" Poplar S44°E 25.25'
P. Pole S64°E 71.95'
Stump S73°W 54.70'
Old Wit
- MDNR Monument. Position is accepted as a careful and faithful perpetuation of the original corner.
- 12" Poplar N50°W 55.90'
10" Poplar N15°W 24.02'
10" Poplar S44°E 25.25'
P. Pole S64°E 71.95'


- August 2001
2 surveys Sections 30 & 31
Carl Kiskila #33981
Fnd. DNR mon.
- January 2002 LCRC, Liber 3, Pg 185
Carl Kiskila #33981
Fnd. DNR mon.
P. pole N60°E 71.97'
8" Poplar S40°E 25.25'
8" Poplar S76°W 54.65'
12" Poplar N44°W 55.90'

ACCEPTED BY THE CHEBOYGAN
COUNTY SURVEY PEER GROUP
AS THE OFFICIAL CORNER UNDER
P.A. 945 OF 1900, AS AMENDED, AT
A MEETING HELD ON 0-29-06

James H. Sawyer

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-11 MDNR Monument. Position is accepted as a careful and faithful perpetuation of the original corner.

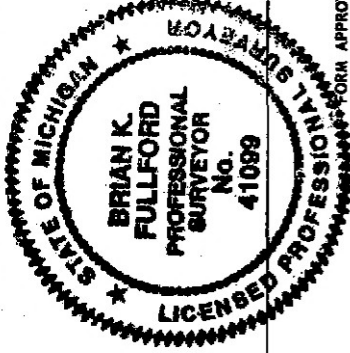

Signed by *Brian K. Fullford*

Surveyor's Michigan License No. 41099

Date September 11, 2006