

For corners in

CHEBOYGAN
(County)

Located In:

Corner Code #



RECEIVED FOR RECORD
MARY ELLEN TRYBAN, CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN
08/09/2005 1:34:55 PM

1. Public Land Survey

T 35N R 2W

E-9

T R

T R

T R

T R

2. Property Controlling

S

in Section

S

3. Miscellaneous

S

Property in Sec.

S R

RECEIPT# 13119, STATION 1
LAND CORNER RECORDAT

\$14.00

Register of Deeds Stamp & File
Number

4. Lot No. _____, Recorded Plat
5. Private Claims

I, BRIAN K. FULLFORD, in a field survey on May 4, 2005 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

1855 Harvey Mellen
Set post
S57°W 20 links 12" Y. Pine
S28°E 41 links 14" Y. Pine

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Fnd DeLaMeter T-iron
S86°E 21.28' 10" Oak
N87°W 12.80' 8" Jack Pine
S40°W 46.40' 9" Oak
N25°E 55.94' 17" R. Pine
South 22' C/L two-track
Fence heading North & East

ACCEPTED BY THE CHEBOYGAN
COUNTY SURVEY PEER GROUP
AS THE OFFICIAL CORNER UNDER
PAR. 66 OF 1939, AS AMENDED, AT
A MEETING HELD ON 5-26-05

James H. [Signature]


Distance measures 2644.71' to D-9, with
Good line from C-9 to D-9 to E-9.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-9 Pulled T-iron & replaced with 5/8" x 36" bar and Cheboygan County Remonumentation Cap.
Position is accepted as a careful and faithful perpetuation of the original corner.

S86°E 21.28' 10" Oak
N87°W 12.80' 8" Jack Pine
S40°W 46.40' 9" Oak
N25°E 55.94' 17" R. Pine
South 22' C/L two-track
Fence heading North & East

Distance measures 2644.71' to D-9, with
Good line from C-9 to D-9 to E-9.

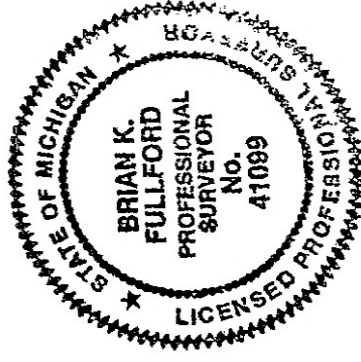

Signed by [Signature] Date June 21, 2005

Surveyor's Michigan License No. 41099

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2								
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							