SURVEY & REMONUMENTATION

JAN 3 4 2006

SECTION

Alcona County
Remonumentation
Liber 3 Page 111

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

0
Filed for Record in
ALCONA COUNTY MICHIGAN
KAREN V HEALY
01-03-2006 At 09:26 am.
LAND CORNER 14.00

Received 12-29-2005

Alcona County
Remonumentation
Liber_____ Page_____

Register of Deeds Stamp & File Number

For corners in ALCONA (County)

2005 Alcona County Remonumentation

	Located In:	Corner Code #
1. Public Land Survey	T25N, R8E	E-12
	T___ R___	
	T___ R___	
	T___ R___	
	T___ R___	
2. Property Controlling in Section	S___ T___ R___	
	S___ T___ R___	
3. Miscellaneous Property in Sec.	S___ T___ R___	
	S___ T___ R___	

4. Lot No. _____, Recorded Plat _____

5. Private Claims _____

T25N, R8E

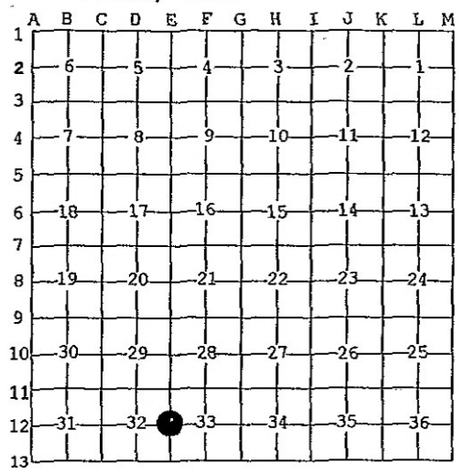

I, John F. Oliver, in a field survey on Dec. 10, 2005 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

E-12: 1843: GLO sur. by J. Mullett - set post and referenced
date unknown: sur. by NE sur. - cor. not identified

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

E-12: fd. large nail with fence lines running to the East and West and 1 foot East of N-S rd centerline

no evidence recovered from GLO survey of 1843

accepted

APPROVED LAND CORNER
P A 345 of 1990
ALCONA COUNTY
Date 12-20-05
County Rep. D R L

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-12: placed stamped alum. cap on 1/2" rod at the corner position

referenced:

18" w. pine - N 55°W - 41.80'
p. pole - S 70°W - 47.43'
15" w. pine - S 15°E - 75.41'
8" jack pine - N 45°E - 51.87'

STATE OF MICHIGAN
JOHN F. OLIVER
LAND SURVEYOR
No. 19840
REGISTERED LAND SURVEYOR

Signed by John F. Oliver

Surveyor's Michigan License No. 19840

Date Dec. 14, 2005

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14,1975
REVISED JAN., 1983
REVISED OCT., 1995