DEPARTMENT OF NATURAL RESOURCES
STATE OF MICHIGAN
TIMBER SALE PROSPECTUS #7894

SCHEDULED SALE DATE AND TIME: **9:00 a.m. (local time) on December 8, 2026.**
LOCATION: **ROSCOMMON MGMT UNIT, 8717B N ROSCOMMON RD., ROSCOMMON, MI 48653**.

CONTACT NAME: Jason Lewicki
PHONE NUMBER: (989) 745-5870

PROSPECTUS NOTE: The bidder is advised to inspect the sale area and review the location, estimated volumes, operating costs and contract terms of proposed sales. Please be aware that some landowners may request 60 days or more notice for access across their land.

Notice is hereby given that bids will be received by the Unit Manager, ROSCOMMON MANAGEMENT UNIT, for certain timber on the following described lands:

North Life Mix (71-007-26) / T23N, R01W, SEC. 32, S1/2NE,NESE.
T23N, R01W, SEC. 33, NENW,SWNW,N1/2NE,SW,NWSE.
T23N, R01W, SEC. 33, S1/2SE.
T23N, R01W, SEC. 34, NWNW,NWNE,NWSW,S1/2SW.
Roscommon County, Advertised Price $159,920.00, 177.8 Acres, Aspen, Hardwood.
SALE NOTE: This sale primarily consists of Aspen & Oak Clearcuts. It contains one 23.6 acre thinning unit. Payment Units 1-2 & 7-9 have the "no exceptions" oak wilt spec due to scattered single oak trees.

A recreation site such as a trail, pathway, or campground is within the sale area or the vicinity. Certain restrictions/specifications may be applicable including time restrictions.

TIMBER SALE INFORMATION

North Life Mix (71-007-26)
T23N, R01W, SEC. 32; T23N, R01W, SEC. 33; T23N, R01W, SEC. 34.
Roscommon County (Advertised Price $159,920.00)

SALE NOTE: This sale primarily consists of Aspen & Oak Clearcuts. It contains one 23.6 acre thinning unit. Payment Units 1-2 & 7-9 have the "no exceptions" oak wilt spec due to scattered single oak trees.

A recreation site such as a trail, pathway, or campground is within the sale area or the vicinity. Certain restrictions/specifications may be applicable including time restrictions.

A timber sale contract for this lump sum, sealed bid timber sale will be awarded to the responsible bidder offering the highest sealed bid price. All units of volume listed below were estimated using the Inventory Manager computer program and the new Michigan taper model. Bids must be at or above the following advertised price for each product and species:

PRODUCTS & SPECIES	ESTIMATED UNITS*		ADVERTISED PRICE
Sawtimber			
Black/Red (Hybrid) Oak	20.7	MBF	$ 141.00 / MBF
Jack Pine	11.7	MBF	$ 35.00 / MBF
Mixed Aspen	125.1	MBF	$ 77.00 / MBF
Red Maple	98.5	MBF	$ 62.00 / MBF
Red Oak	282.2	MBF	$ 107.00 / MBF
Red Pine	45.2	MBF	$ 95.00 / MBF
Sugar Maple	5.4	MBF	$ 159.00 / MBF
White Oak	18.9	MBF	$ 64.00 / MBF
Pulpwood			
Balsam Fir	11	Cords	$ 24.90 / Cord
Jack Pine	209	Cords	$ 10.25 / Cord
Mixed Aspen	1,969	Cords	$ 37.15 / Cord
Mixed Hardwood	59	Cords	$ 22.40 / Cord
Mixed Oak	543	Cords	$ 19.15 / Cord
Red Maple	642	Cords	$ 22.40 / Cord
Red Pine	35	Cords	$ 47.90 / Cord
White Pine	29	Cords	$ 32.85 / Cord

* The total volume is statistically estimated within plus (+) or minus (-) 11.51 percent. There are an estimated 4,920 cords on this timber sale, plus or minus 566 cords at the 95% confidence level. The estimated units are final and not subject to adjustment. Prospective bidders are urged to examine this timber and to make their own estimates of quantity and quality.

BOND AND PAYMENT SCHEDULE:

1. A bond in the amount of $7,996.00 to insure faithful performance of the conditions of the contract will be deposited by the successful bidder within 21 days of the sale award.
2. Cutting in any sale or unit without the required advance payment would be considered a trespass.
3. Total payment must be paid in advance or according to the following schedule:
   (a) Ten percent (10%) of the sale value must be paid within 21 days of the sale award.
   (b) The 10% down payment will be credited towards the first unit cut.
   (c) Payment for each of the following units must be made before cutting begins in that unit:

PAYMENT UNIT NUMBER	PERCENT OF TOTAL SALE VALUE
01	2.8%
02	5.2%
03	0.3%
04	26.0%
05	25.5%
06	3.5%
07	4.6%
08	16.3%
09	15.8%

4. If no cutting takes place, the 10% down payment will not be refunded.
5. Operations on the contract issued will terminate on 12/31/2029.

SALE STATISTICS

Volumes were calculated in cubic feet using the Michigan taper model. Cubic foot volume includes all wood inside bark for the product indicated. For display purposes, cubic feet were converted to cords and MBF using a simple conversion factor, e.g. 79 cubic feet per cord and 185 cubic feet per MBF. The cubic foot volumes are precise; the cords and MBF volumes are not. Cubic foot volume cannot be directly converted to cords or boards with precision.

SALE VOLUMES

The total estimated sale volume may not equal the sum of the species/products due to the nature of statistical calculations associated with double sampling methodology.

VOLUME			STATISTICAL RANGE IN CORDS	
TOTAL CUBIC FEET	TOTAL CORDS	PERCENT ERROR	MINIMUM	MAXIMUM
388,641	4,920	11.51%	4,353	5,486

VDU VOLUMES

A VDU is a Volume Determination Unit. Volumes and their associated statistics are calculated at the VDU level and summarized to the sale level. There is often a one to one relationship between a VDU and a Payment Unit, but not always, depending on the cruise design. Refer to the VDU TO PAYMENT UNIT table.

	VOLUME			RANGE IN CORDS	
VDU	TOTAL CUBIC FEET	TOTAL CORDS	PERCENT ERROR	MINIMUM	MAXIMUM
43	192,940	2,442	18.68%	1,986	2,898
49	19,884	252	29.42%	178	326
54	15,273	193	43.61%	109	278
64	23,516	298	45.36%	163	433
72	119,516	1,513	19.01%	1,225	1,800
103	3,890	49	73.67%	13	86
111	13,622	172	31.41%	118	227
TOTAL:	**388,641**	**4,920**		**3,792**	**6,047**

VDU TO PAYMENT UNIT

When a VDU is associated with more than one Payment Unit (PU), the VDU volumes are assigned to the PU based on acres of the VDU within the PU.

VDU	VDU ACRES	PU	PU ACRES
43	71.9	4	36.3
		5	35.6
49	23.6	7	23.6
54	17.5	1	17.5
64	15.3	2	15.3
72	39.4	8	20.0
		9	19.4
103	2.2	3	2.2
111	7.9	6	7.9
TOTAL:	**177.8**		**177.8**

DESCRIPTION OF TIMBER BY PU (PU)

PU	MARKET GROUP	PRODUCT	QUANTITY	UNIT	ACRES	ADVERTISE PRICE
1	Black/Red (Hybrid	Sawtimber	3.4	MBF	17.5	$4,409.05
	Jack Pine		4.3	MBF		
	Red Pine		11.2	MBF		
	Jack Pine	Pulpwood	98	Cords		
	Mixed Aspen		28	Cords		
	B. T. Aspen		*28*	*Cords*		
	Mixed Oak		15	Cords		
	/Red (Hybrid) Oak		*15*	*Cords*		
	Red Pine		8	Cords		
2	Black/Red (Hybrid	Sawtimber	0.8	MBF	15.3	$8,280.45
	Jack Pine		4.1	MBF		
	Mixed Aspen		1.6	MBF		
	B. T. Aspen		*1.6*	*MBF*		
	Red Pine		9.0	MBF		
	Jack Pine	Pulpwood	69	Cords		
	Mixed Aspen		117	Cords		
	B. T. Aspen		*111*	*Cords*		
	Quaking Aspen		*6*	*Cords*		
	Mixed Oak		52	Cords		
	/Red (Hybrid) Oak		*52*	*Cords*		
	Red Pine		16	Cords		
	White Pine		7	Cords		
	White Pine	*Sawtimber*	*1.0*	*MBF*		
	White Pine	*Pulpwood*	*5*	*Cords*		
3	Jack Pine	Sawtimber	3.3	MBF	2.2	$546.00
	Jack Pine	Pulpwood	42	Cords		
4	Black/Red (Hybrid	Sawtimber	7.5	MBF	36.3	$41,660.35
	Mixed Aspen		24.5	MBF		
	B. T. Aspen		*12.0*	*MBF*		
	Quaking Aspen		*12.5*	*MBF*		
	Red Maple		39.0	MBF		
	Red Oak		66.5	MBF		
	Red Pine		12.6	MBF		
	Sugar Maple		2.2	MBF		
	Balsam Fir	Pulpwood	6	Cords		
	Mixed Aspen		550	Cords		
	B. T. Aspen		*49*	*Cords*		
	Quaking Aspen		*501*	*Cords*		
	Mixed Hardwood		26	Cords		
	Basswood	*Sawtimber*	*1.7*	*MBF*		
	Basswood	*Pulpwood*	*8*	*Cords*		
	Black Cherry		*2*	*Cords*		
	Paper Birch		*2*	*Cords*		
	Sugar Maple		*9*	*Cords*		
	White Ash		*2*	*Cords*		
	Mixed Oak		89	Cords		
	/Red (Hybrid) Oak		*23*	*Cords*		
	Red Oak		*66*	*Cords*		
	Red Maple		200	Cords		
	Red Pine		6	Cords		
5	Black/Red (Hybrid	Sawtimber	7.4	MBF	35.6	$40,795.50
	Mixed Aspen		23.9	MBF		
	B. T. Aspen		*11.7*	*MBF*		
	Quaking Aspen		*12.2*	*MBF*		
	Red Maple		38.3	MBF		

DESCRIPTION OF TIMBER BY PU (PU), CON'T

PU	MARKET GROUP	PRODUCT	QUANTITY	UNIT	ACRES	ADVERTISE PRICE
5 con't	Red Oak	Sawtimber	65.3	MBF		
	Red Pine		12.4	MBF		
	Sugar Maple		2.1	MBF		
	Balsam Fir	Pulpwood	5	Cords		
	Mixed Aspen		540	Cords		
	B. T. Aspen		*48*	*Cords*		
	Quaking Aspen		*492*	*Cords*		
	Mixed Hardwood		23	Cords		
	Basswood	*Sawtimber*	*1.6*	*MBF*		
	Basswood	*Pulpwood*	*8*	*Cords*		
	Black Cherry		*2*	*Cords*		
	Paper Birch		*1*	*Cords*		
	Sugar Maple		*8*	*Cords*		
	White Ash		*1*	*Cords*		
	Mixed Oak		88	Cords		
	/Red (Hybrid) Oak		*23*	*Cords*		
	Red Oak		*65*	*Cords*		
	Red Maple		197	Cords		
	Red Pine		5	Cords		
6	Mixed Aspen	Sawtimber	1.3	MBF	7.9	$5,556.05
	B. T. Aspen		*1.3*	*MBF*		
	Red Maple		2.2	MBF		
	Red Oak		14.9	MBF		
	White Oak		5.1	MBF		
	Mixed Aspen	Pulpwood	48	Cords		
	B. T. Aspen		*44*	*Cords*		
	Quaking Aspen		*4*	*Cords*		
	Mixed Oak		23	Cords		
	Red Oak		*9*	*Cords*		
	White Oak		*14*	*Cords*		
	Red Maple		29	Cords		
	White Pine		16	Cords		
	White Pine	*Sawtimber*	*3.2*	*MBF*		
	White Pine	*Pulpwood*	*10*	*Cords*		
7	Mixed Aspen	Sawtimber	6.6	MBF	23.6	$7,329.75
	B. T. Aspen		*6.6*	*MBF*		
	Red Maple		19.0	MBF		
	Red Oak		6.1	MBF		
	Sugar Maple		1.1	MBF		
	White Oak		1.7	MBF		
	Mixed Aspen	Pulpwood	57	Cords		
	B. T. Aspen		*25*	*Cords*		
	Quaking Aspen		*32*	*Cords*		
	Mixed Hardwood		9	Cords		
	Basswood	*Sawtimber*	*1.4*	*MBF*		
	Basswood	*Pulpwood*	*1*	*Cords*		
	Ironwood		*4*	*Cords*		
	Sugar Maple		*1*	*Cords*		
	Mixed Oak		22	Cords		
	Red Oak		*16*	*Cords*		
	White Oak		*6*	*Cords*		
	Red Maple		79	Cords		
	White Pine		6	Cords		
	White Pine		*6*	*Cords*		
8	Black/Red (Hybrid	Sawtimber	0.8	MBF	20.0	$26,067.15

DESCRIPTION OF TIMBER BY PU (PU), CON'T

PU	MARKET GROUP	PRODUCT	QUANTITY	UNIT	ACRES	ADVERTISE PRICE
8 con't	Mixed Aspen	Sawtimber	34.1	MBF		
	B. T. Aspen		*34.1*	*MBF*		
	Red Oak		65.7	MBF		
	White Oak		6.1	MBF		
	Mixed Aspen	Pulpwood	319	Cords		
	B. T. Aspen		*293*	*Cords*		
	Quaking Aspen		*26*	*Cords*		
	Mixed Oak		130	Cords		
	/Red (Hybrid) Oak		*6*	*Cords*		
	Red Oak		*107*	*Cords*		
	White Oak		*17*	*Cords*		
	Red Maple		70	Cords		
9	Black/Red (Hybrid	Sawtimber	0.8	MBF	19.4	$25,253.30
	Mixed Aspen		33.1	MBF		
	B. T. Aspen		*33.1*	*MBF*		
	Red Oak		63.7	MBF		
	White Oak		6.0	MBF		
	Mixed Aspen	Pulpwood	310	Cords		
	B. T. Aspen		*285*	*Cords*		
	Quaking Aspen		*25*	*Cords*		
	Mixed Oak		124	Cords		
	/Red (Hybrid) Oak		*5*	*Cords*		
	Red Oak		*103*	*Cords*		
	White Oak		*16*	*Cords*		
	Red Maple		67	Cords		
		TOTAL:	607.7	MBF		
		TOTAL:	3,496	Cords		

Sale Specific Conditions & Requirements

Sale Name: North Life Mix **Sale Number: 71-007-26 Seq#: 1**

1 - Sale Area

1.2 - Boundaries

1.2.1 - Painted Boundaries (9/19)
The sale boundary and Payment Unit boundaries are marked and identified by red and yellow paint, Artesia beach Road and Romancky Road (see Timber Sale Map). Exterior sale boundary lines against state are marked with red paint. The north boundary of PU(s) 1 & 2 are designated by Artesia Beach Road. The south boundary of PU(s) 8 & 9 are designated by Romancky Road. Interior Payment Unit boundaries are marked with yellow paint. The painted boundary line trees are not Included Timber and are to be protected. Yellow painted trees designating an interior Payment Unit boundary are only to be cut when all surrounding Payment Units have been paid.

2 - Timber Specifications

2.1 - Included Timber

2.1.1 - Clearcut Unit(s) with Unmerchantable Trees (6/14)
Within Payment Unit(s) 1 & 3-5, cut all trees that are two (2) inches or more at DBH with the following exceptions:

PU 1 - Do not cut pole sized oak (oak <10" measured at DBH)
PU 4 & 5 - Do not cut white pine or white oak

2.1.2 - Clearcut Unit(s) w/o Unmerchantable Trees (8/11)
Within Payment Unit(s) 2, cut all trees which meet minimum piece specifications in 2.2 Utilization

2.1.3 - Cut Tree Marked Unit(s) (12/08)
Within Payment Unit(s) 7, all trees are designated for cutting when marked with orange paint above and below stump height, regardless of merchantability.

2.1.7 - Leave Tree Marked Unit(s) (6/14)
Within Payment Unit(s) 6 & 8-9, cut all trees that are two (2) inches or more at DBH with the following exceptions:

PU 6 - Do not cut green painted trees
PU 8 & 9 - Do not cut green painted trees or White Pine

2.2 - Utilization

2.2.10 - No Chipping Tops and Limbs (8/16)
Within Payment Unit(s) 1-3, chipping of limbs or tops is not permitted unless cones and top material is spread evenly throughout the Payment Units. Limbs and the remaining top must be left on site and scattered.

3 - Payments

3.4 - Damaged Timber

3.4.1 - Damaged Timber (12/24)
General Condition and Requirement 3.4 Damaged Timber, defines liquidated damages for undesignated live merchantable trees which are cut or injured. In addition, extreme care should be taken to avoid damage to tree seedlings and saplings in Payment Units 1-3 & 6.

If more than 33% of the tree seedlings or saplings (1/4" to 4.5" DBH) within a specified portion of the Sale Area are damaged, liquidated damages will be assessed at $500 per acre for all acreage within that specified portion of the Sale Area that was damaged.

No damage is acceptable to undesignated live merchantable trees. Within the Sale Area, if more than 5% of trees (> 4.5"

DBH) within a specified area of the sale are damaged, liquidated damages will be assessed for all trees damaged. Rates will be in accordance with General Condition and Requirement 3.4 Damaged Timber.

4 - Transportation

4.1 - Construction

4.1.6 - Road Construction (4/24)
Construction of new roads or improvements of existing roads shall be done in such a way as to minimize the environmental and visual impacts. Merchantable trees shall be cut and utilized unless otherwise directed. Non-merchantable trees shall be severed and laid flat on the ground. Slash shall be scattered, not left in windrows, and kept a minimum of 10 feet back from the road edge. Stumps shall be set upright, not left on edge, and be moved at least 10 feet away from the road edge. Disturbed soil shall be feathered into the woods and not left in berms or windrows.

4.1.7 - Road Closure (10/11)
All new roads built into the sale must be blocked to vehicle traffic upon completion of the sale. Overgrown roads that are reopened shall be considered new roads. In general, this will require constructing a four (4') foot high berm of stumps and logs covered with earth. These roads must be rendered impassable to cars and trucks. Contact the Sale Administrator for specific details of design and placement.

4.2 - Maintenance

4.2.5 - Two Wheel Drive Condition (2/04)
All existing trail roads on and adjacent to the Sale Area must be passable by two-wheel drive traffic for the duration of the sale.

5 - Operations

5.1 - Notification

5.1.1 - Pre-sale Conference (10/25)
A pre-sale conference on site between the Purchaser and Sale Administrator is required prior to beginning any operations. The Unit Manager or his/her representative must be contacted at least 5 days in advance to schedule the conference.

5.1.4 - Post-Sale Conference (10/16)
A post-sale conference on site between the Purchaser and sale administrator is required 5 days prior to the completion of active logging operations to determine clean-up and repair of landings, road edges, and the fulfillment of other contract specifications.

5.2 - Conduct of Operations

5.2.1 - Slash

5.2.1.8 - Slash Height (12/08)
No slash or tree tops may exceed 36 inches in height.

5.2.2 - Hazard Trees/Snags

5.2.2.1 - Den Trees (10/16)
Obvious hollow and/or den trees shall be protected and left standing unless they are a safety hazard.

5.2.3 - Operating Restrictions

5.2.3.4 - Oak Wilt Restriction, No Exceptions (1/18)
Within Payment Unit(s) 1-2 & 7-9 cutting, skidding, hauling within the sale and brushing of access roads to the sale are not permitted during the period of April 15 to July 15. No exceptions will be granted. This is necessary to reduce the spread of oak wilt.

5.2.3.11 - Coppice Regeneration Protection (4/10)
Timber harvesting in any Payment Unit must be completed before significant sprouting occurs in that Payment Unit, so as to minimize damage to the new regeneration. Any post-harvest operations, such as chipping, must be completed before sprouting of regeneration occurs. If it is anticipated that chipping will be delayed, then tops shall be carried to one central

location or left unchipped. The Unit Manager or his/her representative may cease such operations if sprouting occurs before the operation is complete. If more than 33% of newly sprouted seedlings are damaged, then damages of $500 per acre will be charged.

5.2.3.15 - Oak Wilt Restriction, Access Roads (11/23)
Brushing of access roads to Payment Unit(s) 4-6 must be completed prior to April 15 in order to use these roads for hauling timber or moving machinery between April 15 and July 15. If it is determined areas do not require brushing, at the discretion of the Unit Manager or his or her representative, this specification may be waived. This is necessary to reduce the spread of oak wilt.

5.2.4 - Dead and Down Creation

5.2.4.4 - Dead and Down Creation, Grouse (6/18)
To encourage grouse and other wildlife, in Payment Unit(s) 4-5, & 8-9 leave two (2) 10-inch diameter or larger log size pieces on the ground for every two (2) acres. They should be scattered throughout the sale or positioned per the Sale Administrator's instructions. The logs should be placed so they overlap. These pieces should have a minimum length of ten (10) feet. They can be of any tree species and can be an un-merchantable piece of wood or a full tree.

In addition, the Purchaser is also required to leave brush piles along the lowland edges. 8 piles will be required along the SW edges of payment Unit(s) 4-5 along the swamp. 3 piles will be required on the NW edge of Payment Unit 8 along the swamp.

All brush piles at minimum must be 50 yards apart. These piles will consist of two overlapping pieces on the bottom that are 10 inches or larger in diameter and at least 10 feet in length. Smaller diameter tops and slash will then be piled on top so that they overlap with each other and create voids below.

5.2.22 - Operating Caution

5.2.22.1 - Operating Caution (6/11)
It is recommended, but not required, that within Payment Unit(s) 4 & 5, cutting, skidding, and hauling occur during dry summer or frozen winter conditions. The reason for the recommendation is due to poorly drained soils.

5.2.32 - Decking/Landing Restoration (9/13)
All decking and landing areas must have the surface area restored to a condition equal to or better than before. This is to ensure the proper regeneration of the stand. Wood debris, chips and "cookies" from trimmings must be removed or scattered away from landing and loading areas and may not be windrowed on the edge.

5.2.38 - No Decking Against Live Trees (2/04)
Cut products may not be decked against unmarked or designated leave trees.

5.2.39 - ORV Trail/Route Protection (4/18)
An ORV trail is located to the East of Payment Units 3 & 8-9, and is shown on the Timber Sale Map. If the trail is used for hauling the following applies. Do not cut trees or damage posts with yellow ORV markers. Any stumps cut for access within five (5) feet of the trail must be cut flush with the ground. Maintain a 20-foot-wide slash, debris, and rut free zone daily using the ORV trail or route as the centerline.

5.4 - Soil Protection

5.4.1 - Rutting Restriction, General (7/16)
Operations are to cease immediately if equipment and weather conditions result in rutting of roads and/or skid trails which are 12 inches or greater in depth and 50 feet in length. The Unit Manager or his/her representative may restrict hauling and/or skidding if ruts exceed the specified depth. With the Unit Manager or his/her representative's approval, the Purchaser may return to the area when the risk of rutting has decreased.

6 - Safety and Fire Prevention

6.2 - Signing

6.2.1 - Road Posting (10/20)
The Purchaser is responsible for posting and maintaining caution signs on Atresia Beach Road, Romancky Road and any other

roads involved in removing timber products prior to beginning operations. The road must be posted at appropriate distances from the Sale Area to warn of logging activity and truck traffic. Signs must be removed when harvest operations are suspended or completed. The Purchaser will provide these signs.

6.2.3 - Recreational Trail Posting (10/20)
The Purchaser is responsible for posting and maintaining caution signs on the ORV trails prior to beginning operations. The trail must be posted at appropriate distances from the Sale Area to warn of logging activity and truck traffic at both ends of the trail. Signs must be removed when harvest operations are suspended or completed. The Purchaser will provide these signs.

This specification only applies if the ORV trail East of Payment Units 3 & 8-9 is utilized for hauling.

Michigan Department of Natural Resources - Forest Resources Division

TIMBER SALE MAP

This information provided by authority of Part 525, 1994 PA 451, as amended.

Sale Number	Date
71-007-26	08/05/2026

Forest Management Unit	County	Mapped By: Doug Tyran	Scale	Page	Of
Roscommon Mgt Unit	Roscommon	Cruised By: Doug Tyran	1:20,000	1	1

Township	Range	Section(s) and Subdivision(s)
23N	01W	Sec. 32 S1/2NE,NESE; Sec. 33 NENW,SWNW,N1/2NE,SW,NWSE; Sec. 33 S1/2SE; Sec. 34 NWNW,NWNE,NWSW,S1/2SW;

Cover Type

A = Aspen	J = Jack Pine	O = Oak	U = Upland Brush
B = Paper Birch	K = Rock	P = Lowland Poplar	UM = Upland Mix Forest
C = Cedar	L = Lowland Brush	Q = Mixed Swamp Conifer	V = Bog or Marsh
D = Treed Bog	LM = Lowland Mix Forest	R = Red Pine	W = White Pine
E = Swamp Hardwoods	M = Maple, Beech, Birch	S = Black Spruce	X = Non Stocked
F = Spruce/Fir	MC = Mixed Conifer	T = Tamarack	Y = Sand
G = Grass	MD = Mixed Deciduous		Z = Water
H = Hemlock	N = Marsh		

Density

0 = Non Stocked	5 = Pole Timber Medium
1 = Seedling Sapling Poor	6 = Pole Timber Well
2 = Seedling Sapling Medium	7 = Saw Timber Poor
3 = Seedling Sapling Well	8 = Saw Timber Medium
4 = Pole Timber Poor	9 = Saw Timber Well

Payment Unit Number	Acres	Payment Unit Number	Acres
1	17.5	6	7.9
2	15.3	7	23.6
3	2.2	8	19.9
4	36.3	9	19.4
5	35.6		


North Life Mix


177.8 Acres

0 0.33 0.65 1.3 Miles

N W E S

Locator Map 1:100,000

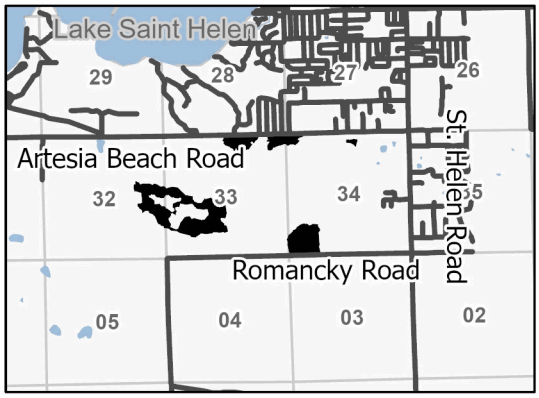

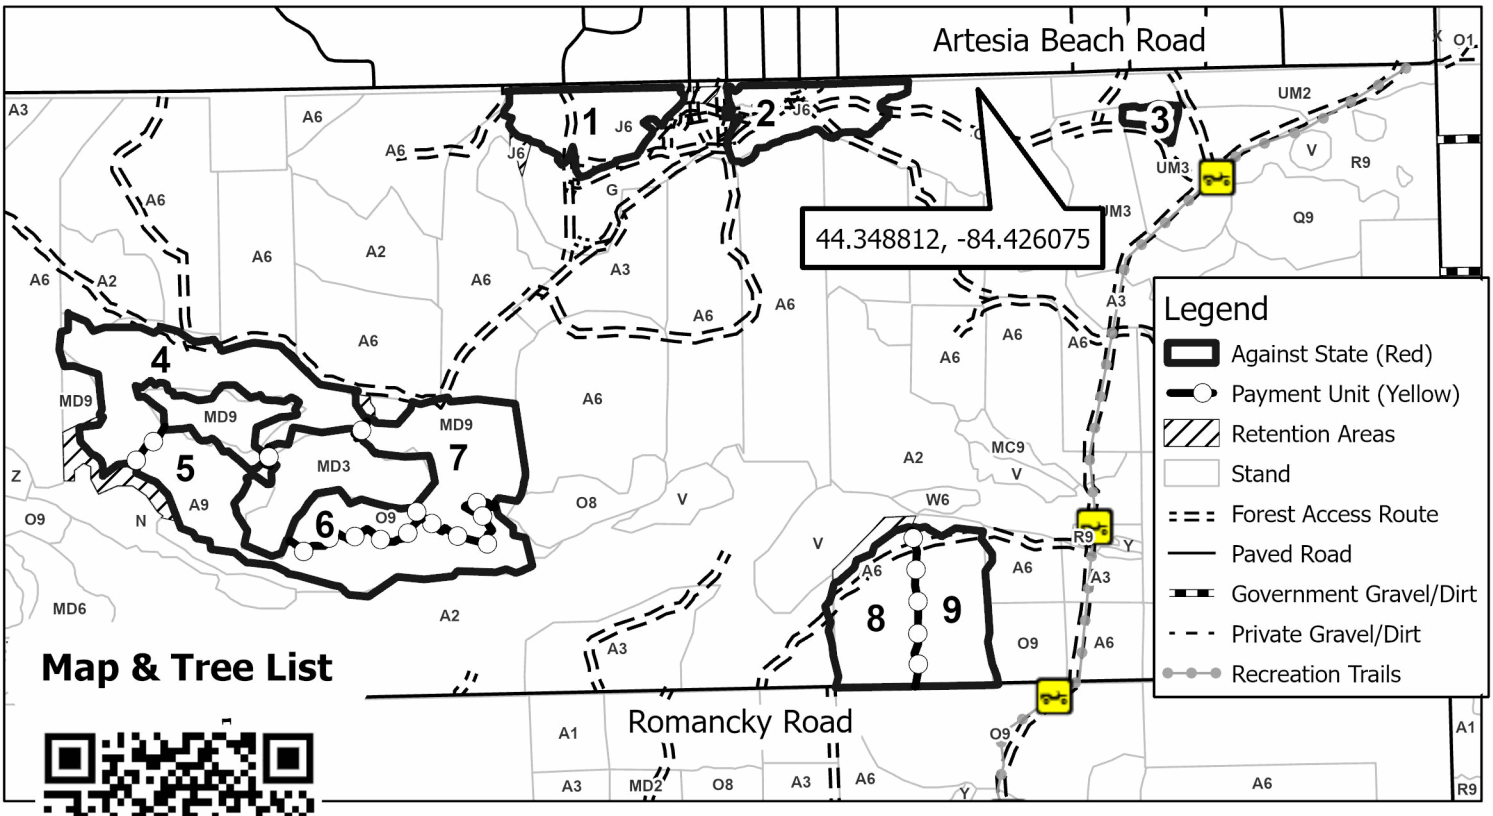

Map & Tree List